



■ 铜镍对焊弯头 Elbow 1.5D
DIN86090

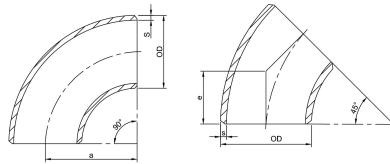


specification		OD		S		a		r ₉₀		Weight	
inch	DN	mm	mm	mm	mm	mm	mm	mm	mm	45°	90°
1/2	15	20	1	25	10.4	0.013	0.028				
3/4	20	25	1.5	27.5	11.4	0.029	0.058				
1	25	30	1.5	33.5	14	0.030	0.06				
1 1/4	32	38	1.5	45	19	0.06	0.12				
1 1/2	40	44.5	1.5	51	21	0.07	0.14				
2	50	57	1.5	72	30	0.13	0.28				
2 1/2	65	76	2	95	39	0.31	0.62				
3	80	89	2	114.5	47	0.44	0.88				
4	100	108	2.5	142.5	59	0.88	1.86				
5	125	133	2.5	181	75	1.30	2.60				
6	150	159	2.5	216	89	1.85	3.70				
7	175	194	3	270	112	2.85	5.70				
8	200	219	3	305	128	4.35	8.70				
10	250	267	3	378	157	6.55	13.10				
12	300	324	4	457	189	12.80	25.60				
14	350	368	4	533.5	221	17.00	34.00				
16	400	419	4	609.5	252	24.85	49.70				
18	450	457	4.5	686	284	30.95	61.90				
20	500	508	5	762	316	41.95	83.90				
24	600	610	5	914	379	62.00	124.00				

■ 铜镍对焊弯头 Elbow 1.0D
DIN86090

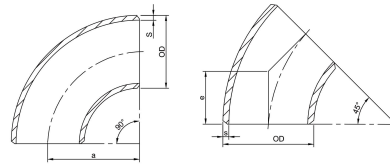


specification		OD		S		a		r ₉₀		Weight	
inch	DN	mm	mm	mm	mm	mm	mm	mm	mm	45°	90°
1	25	30	1.5	30	12	0.027	0.054				
1 1/4	32	38	1.5	32.5	14	0.033	0.076				
1 1/2	40	44.5	1.5	40	17	0.037	0.144				
2	50	57	1.5	52.5	22	0.10	0.20				
2 1/2	65	76	2	70	29	0.23	0.46				
3	80	89	2	82.5	34	0.32	0.65				
4	100	108	2.5	100	41	0.58	1.16				
5	125	125	2.5	125	52	0.90	1.80				
6	150	159	2.5	150	62	1.20	2.40				
7	175	194	3	180	75	1.90	3.80				
8	200	219	3	210	87	3.00	6.00				
10	250	267	3	255	106	4.44	8.88				
12	300	324	4	305	126	8.55	17.10				
14	350	368	4	352.5	148	11.30	22.60				
16	400	419	4	400	166	16.40	32.80				
18	450	457	4.5	455	189	20.45	40.90				
20	500	508	5	505	210	28.10	56.20				
24	600	610	5	610	253	45.00	90.00				

■ 铜镍对焊弯头 Elbow 90° 45° LR
EEMUA 234

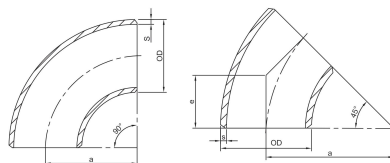

specification		OD		S 15bar		S 20bar		a		r ₉₀		Weight 15bar		Weight 20bar	
inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg	kg	kg	kg	kg
1	30	2.5	2.5	38	22	0.12	0.12	0.06	0.06						
1 1/4	36	2.5	2.5	48	25	0.15	0.15	0.09	0.09						
1 1/2	44.5	2.5	2.5	57	29	0.30	0.30	0.15	0.15						
2	57	2.5	2.5	76	35	0.52	0.52	0.25	0.25						
2 1/2	76.1	2.5	2.5	95	44	0.90	0.90	0.45	0.45						
3	88.9	2.5	2.5	114	51	1.25	1.25	0.65	0.65						
4	108	3	3	132	64	2.10	2.10	1	1						
6	159	3	3.5	229	95	4.70	5.50	2.30	2.70						
8	219.1	4	4.5	305	127	12	13	6.00	6.50						
10	267	4.5	5.5	381	159	20	24	10	12						
12	323.9	5.5	7	457	190	35	45	17	23						
14	360	6.5	8	533	222	55	67	27	34						
16	419	7	9	610	254	77	99	38	50						
18	457.2	8	9.5	686	286	109	128	54	64						
20	508	8.5	11	762	318	142	184	71	92						
24	610	10.5	13	914	381	252	312	129	156						
28	711	12	15	1067	438	384	460	197	245						
32	813	13.5	17	1219	502	579	725	289	362						
36	914	15.5	19	1372	565	841	1026	420	513						

■ 铜镍对焊弯头 Elbow 90° 45° 1.5D
ASME B16.9

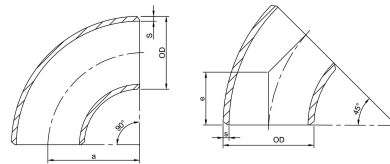

DN		OD		s 10s		a		r ₉₀		Weight	
inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg
1/2	15	21.3	2.11	38	16	0.035	0.07				
3/4	20	26.7	2.11	38	19	0.04	0.08				
1	25	33.4	2.77	38	22	0.065	0.13				
1 1/4	32	42.2	2.77	48	25	0.075	0.15				
1 1/2	40	48.3	2.77	57	29	0.17	0.33				
2	50	60.3	2.77	76	35	0.29	0.58				
2 1/2	65	73	3.05	95	44	0.55	1.1				
3	80	88.9	3.05	114	51	0.77	1.53				
4	100	114.3	3.05	152	64	1.07	2.13				
6	150	168.3	3.4	229	95	2.75	5.50				
8	200	219.1	3.76	305	127	5.64	11.28				
10	250	273	4.19	381	159	9.3	18.6				
12	300	323.8	4.57	457	190	14.54	29.08				
14	350	355.6	4.78	533	222	20.2	40.45				
16	400	406.4	4.78	610	254	28.29	56.58				
18	450	457	4.78	686	286	32.57	65.13				
20	500	508	5.54	762	318	46.26	92.55				
24	600	610	6.35	914	381	76.20	152.4				